

Model: PFWRC66B1S

DHW (Domestic Hot Water)





Wet Rotor Circulator Pumps Sweat Connection Bronze Single Speed Open System Type

Features:

These Power-Flo Pumps Circulator Pumps designed to be installed in residential potable domestic hot water systems to provide recirculation (with a dedicated recirculation pipe loop installed in the system) of domestic hot water resulting in "instant" hot water at fixtures throughout the house. This pump will come equipped with a standard terminal box with 1/2" FNPT to "Hard wire" direct to 115V AC **AND** will come with a 6 Ft. long soft jacketed 3 prong electric cord and terminal box strain relief connector for "outlet plug in" installations.

- **MOTOR:** 2-pole, 3600rpm, single phase, PSC with Thermal protection
- **LIQUID TEMPERATURE:** 32°F - 230°F
- **MAX. SYSTEM PRESSURE:** 145 PSI
- **INSULATION:** Class H
- **VOLUTE:** Lead Free Bronze
- **CONNECTION:** 3/4" Copper Sweat
- **POWER CORD:** 6 Foot with 3 prong plug
- **ACCESSORIES:** PFFP- Fitting Pack, PFDT - Digital Timer, PFSOA - Snap-On Aquastat (Timer and Aquastat can only be used with the 6 Ft power cord with 3 prong plug.)
- **WARRANTY:** 3 year

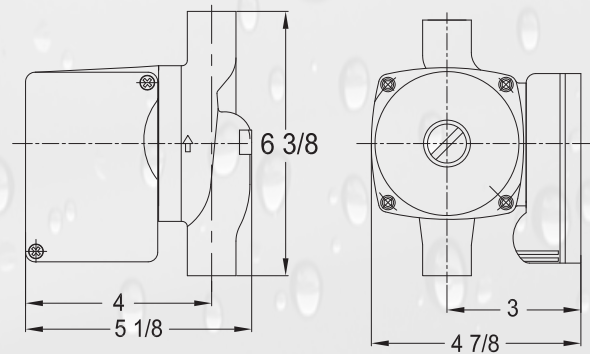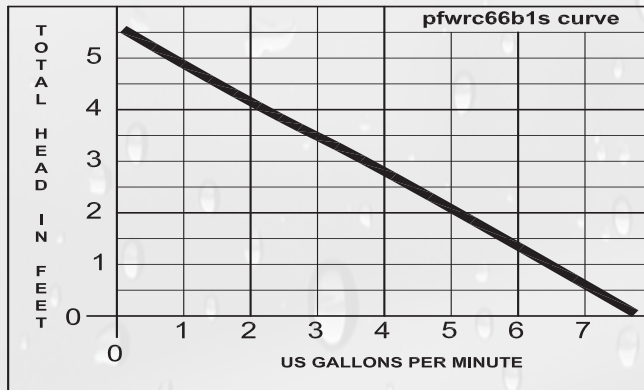

MODEL/PART NUMBER	VOLTS/PHASE	AMPS	WATTS	CAPACITOR	WT. lbs
PFWRC66B1S	115/1	.22	25	2mfd/450V	6

PF	WRC	21	20	Volute Material C, B, S	Motor Voltage 1 or 2	Connection Type F, S, U
Power-Flo	Wet Rotor Circulator	Shut Off Head (ft)	Max Flow (Gal)	C = Cast Iron B = Lead Free Bronze S = Stainless Steel	1 = 115 V 2 = 230V/1P	F = Flanged S = Copper Sweat U = Union

EXAMPLE: PFWRC2120C1F - Power-Flo Pumps - Wet Rotor Circulator - 21' Shut Off Head - 20 GPM Max Flow - Cast Iron Volute - 115 Volt, Flanged Connection.

