


INSTALLATION, SERVICE & PARTS MANUAL



Series: PF5CU 1-1/2" x 1-1/2"
PF7CU 2" x 2"

Universal Drive /Frame Mtd

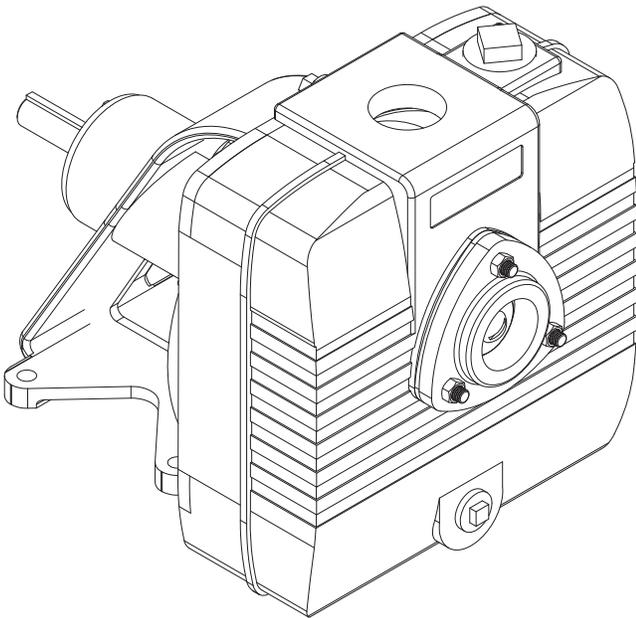

Power-Flo Pumps & Systems

a Power-Flo Technologies company

General Safety Information

Before installation, read the following instructions carefully. Failure to follow instruction and Safety information could cause serious bodily injury, death and/or property damage. Each Power-Flo pump is individually factory tested to insure proper performance. Closely following these instructions will eliminate potential operating problems, assuring years of trouble-free service.

▲ DANGER "Danger" indicates an imminent hazardous situation which, if not avoided, WILL result in death or serious injury.

▲ WARNING "Warning" indicates an imminent hazardous situation which, if not avoided, MAY result in death or serious injury.

▲ CAUTION "Caution" indicates a potentially hazardous situation which, if not avoided, MAY result in minor or moderate injury.

IMPORTANT - Power-Flo Pumps and Systems is not responsible for losses, injury or death resulting from failure to observe these safety precautions, misuse, abuse or misapplication of pumps or equipment.

 **ALL RETURNED PRODUCTS MUST BE CLEANED, SANITIZED, OR DECONTAMINATED PRIOR TO SHIPMENT, TO INSURE EMPLOYEES WILL NOT BE EXPOSED TO HEALTH HAZARDS IN HANDLING SAID MATERIAL. ALL APPLICABLE LAWS AND REGULATIONS SHALL APPLY.**

▲ WARNING Installation, wiring, and junction connections must be in accordance with the National Electric Code and all applicable state and local codes. Requirements may vary depending on usage and location.

® Power-Flo is a registered trademark of Power-Flo Technologies Inc. Other brand and product names are trademarks or registered trademarks of their respective holders. Alteration Rights Reserved. 7/08, 7/09, 3/10, 2/11, 4/12, 1/13, 5/13, 8/14, 12/19, 9/2020, 1/2021

▲ WARNING Installation and servicing is to be conducted by qualified personnel only.

▲ DANGER Keep clear of suction and discharge openings. **Do not** insert fingers in pump with power connected.

▲ WARNING Always wear eye protection when working on pumps. Do not wear loose clothing that may become entangled in moving parts

▲ DANGER Pumps build up heat and pressure during operation. Allow time for pumps to cool before handling or servicing.

▲ DANGER This pump is **not** intended for use in swimming pools or water installations where human contact with pumped fluid.

▲ DANGER Risk of electric shock. To reduce risk of electric shock, always disconnect pump from power source before handling. **Lock out power & tag.**

▲ WARNING **Do not** use these pumps in water over 160°F. **Do not** exceed manufactures recommended maximum performance, as this could cause the motor to overheat.

▲ DANGER Operation against a closed discharge valve will cause premature bearing and seal failure. Heat build up on self-priming and end suction pumps may cause dangerous pressures. A high temperature switch or pressure relief valve is recommended to be installed in pump case.

▲ WARNING Carefully read instruction manuals supplied with motor or engine before operating or servicing.

▲ DANGER **DO NOT** pump hazardous material. These pumps are NOT to be installed in locations classified as hazardous in accordance with the National Electric Code, ANSI/NFPA 70.


▲ WARNING Pumps constructed with or fitted with bronze/brass may contain lead levels higher than considered safe for potable water systems. Lead is known to cause cancer and birth defects or other reproductive harm. Various government agencies have determined that leaded copper alloys should not be used in potable water applications.

 **WARNING:** CANCER AND REPRODUCTIVE HARM- WWW.P65WARNINGS.CA.GOV

IMPORTANT! Prior to installation, record Model Number, MFG Date, and/or serial number, from pump name plate for future reference.

Model:
Serial:
MFG Date:

Specifications

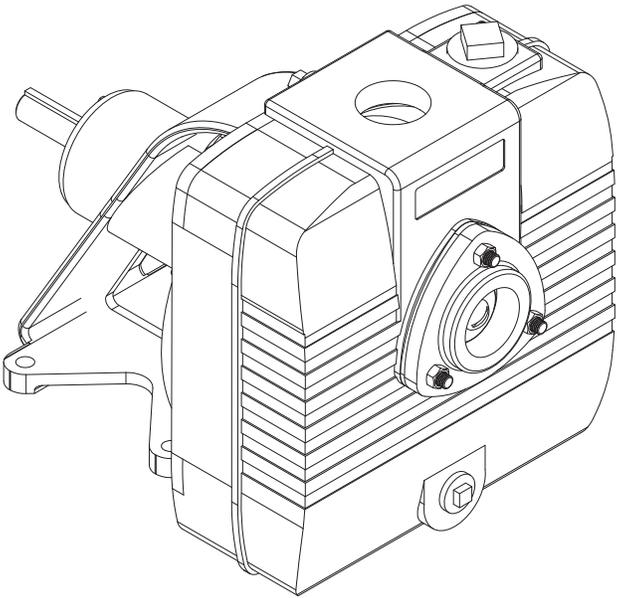

Series: PF5CU

1-1/2" x 1-1/2"


PF7CU 2" x 2"

Universal Drive /Frame Mtd

DISCHARGE PF5CU PF7CU	1-1/2" x 1-1/2" NPT, Female 2" x 2" NPT, Female
LIQUID TEMPERATURE	160°F Continuous
VOLUTE	Cast Iron, Class 30, Removable
BODY	Cast Iron, Class 30
PEDESTAL	Cast Iron, Class 30
SHAFT	Stainless Steel
IMPELLER	Open trash type, dynamically balanced Material: Cast Iron, Class 30
O-RINGS	Buna-N
HARDWARE	Steel & Stainless Steel
PAINT	Air dry enamel
SEAL	Mechanical, Self-lubricating Material: Graphite/Ceramic/NBR-304
BEARING-DRIVE END	Single Row, Ball, Grease Lubricated
BEARING-PUMP END	Single Row, Ball, Grease Lubricated
CHECK VALVE	Neoprene Flap type valve, with steel weight
OPTIONAL	Bronze Volute




Dimensions

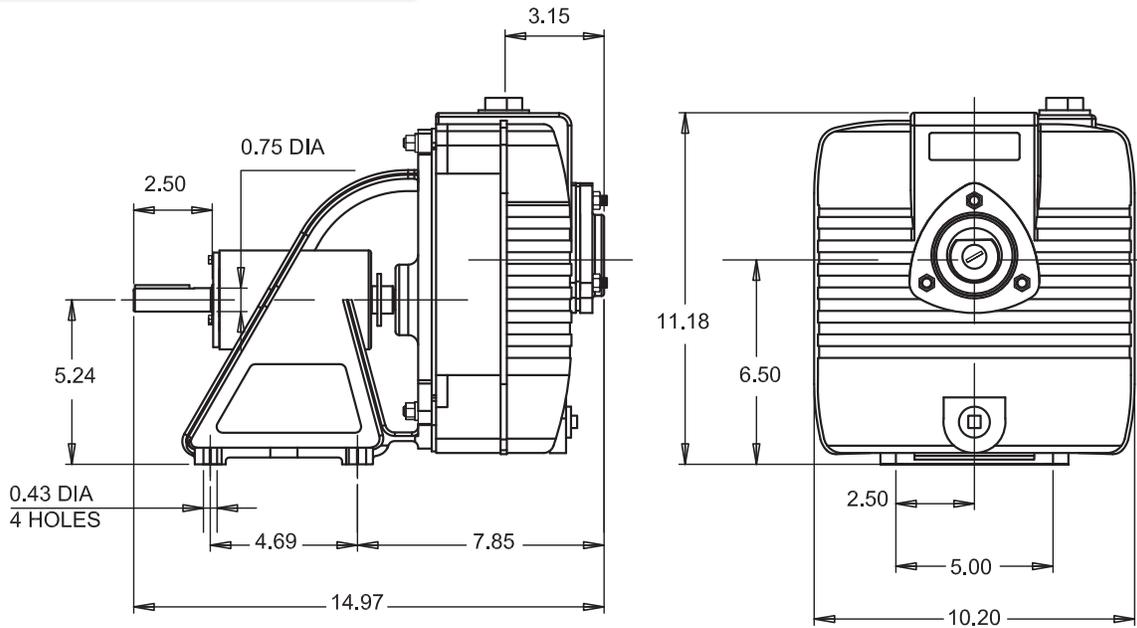

Model	Weight	Suction	Discharge
PF5CU	78 lbs	1-1/2" NPT	1-1/2" NPT


Not for pumping flammable liquids or hazardous materials that is not compatible with pump materials.

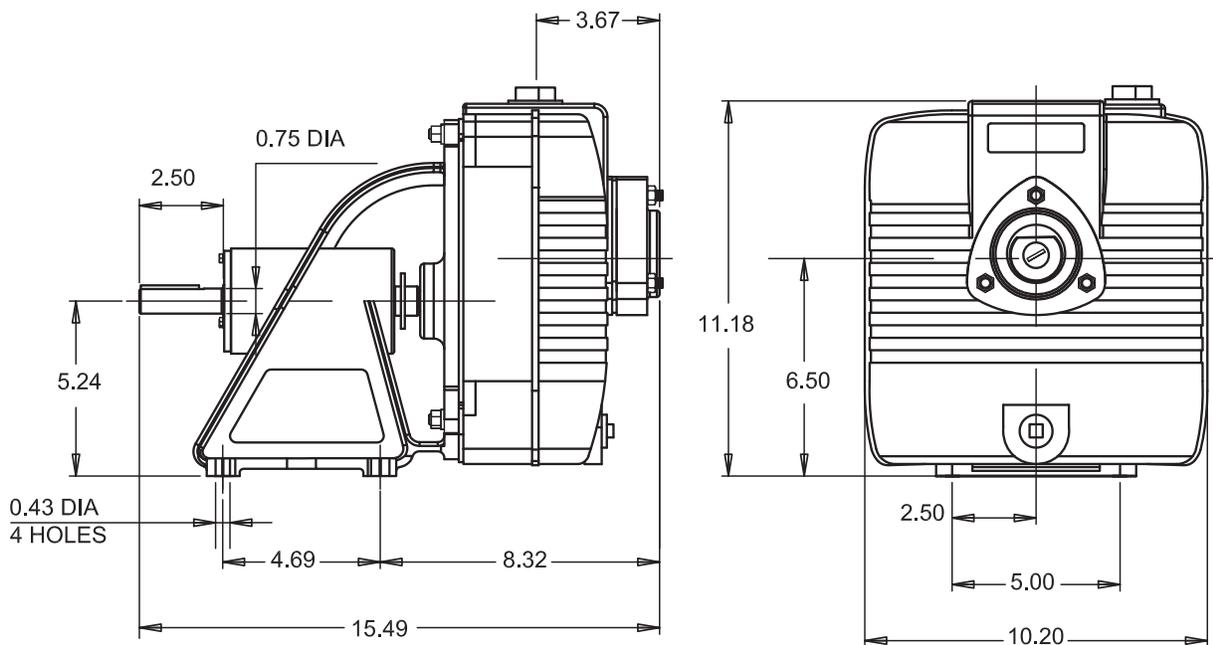


Model	Weight	Suction	Discharge
PF7CU	82 lbs	2" NPT	2" NPT

Not for pumping flammable liquids or hazardous materials that is not compatible with pump materials.

Performance

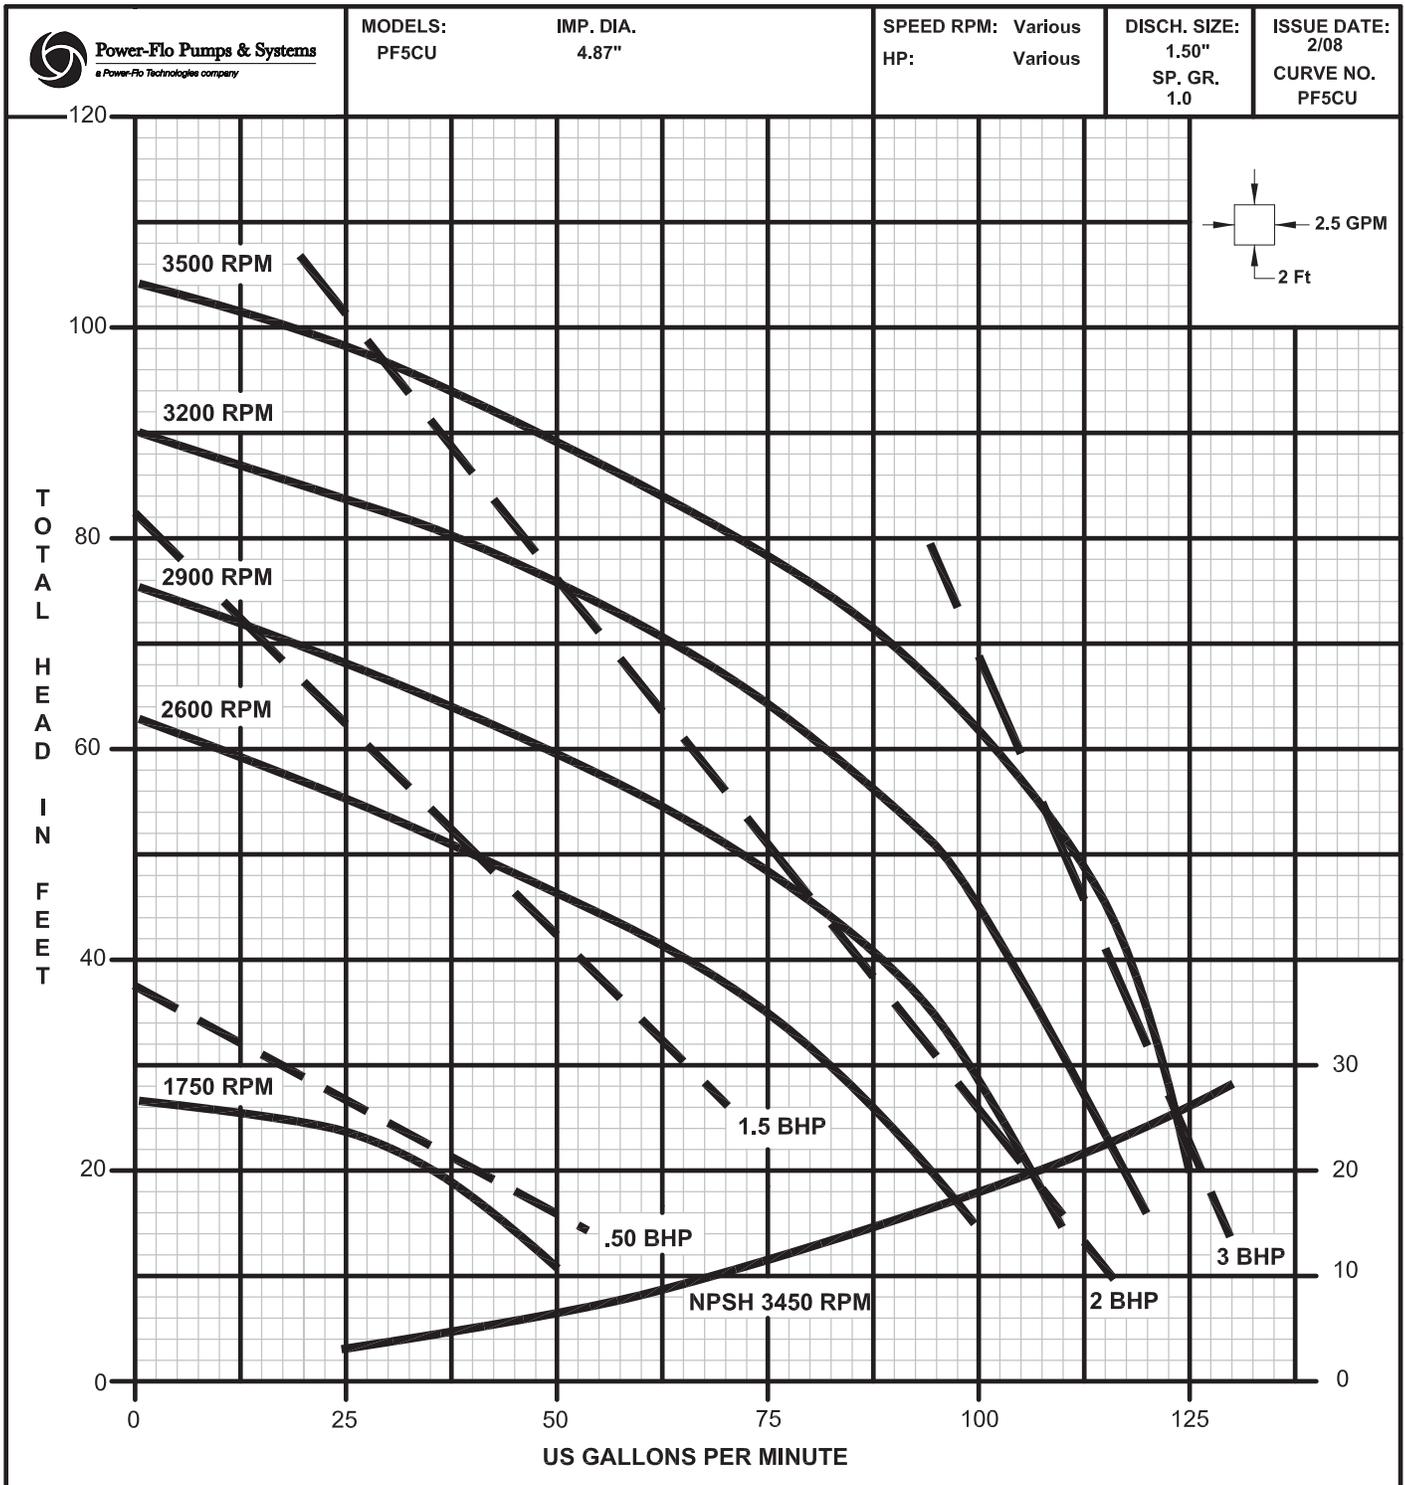

Performance

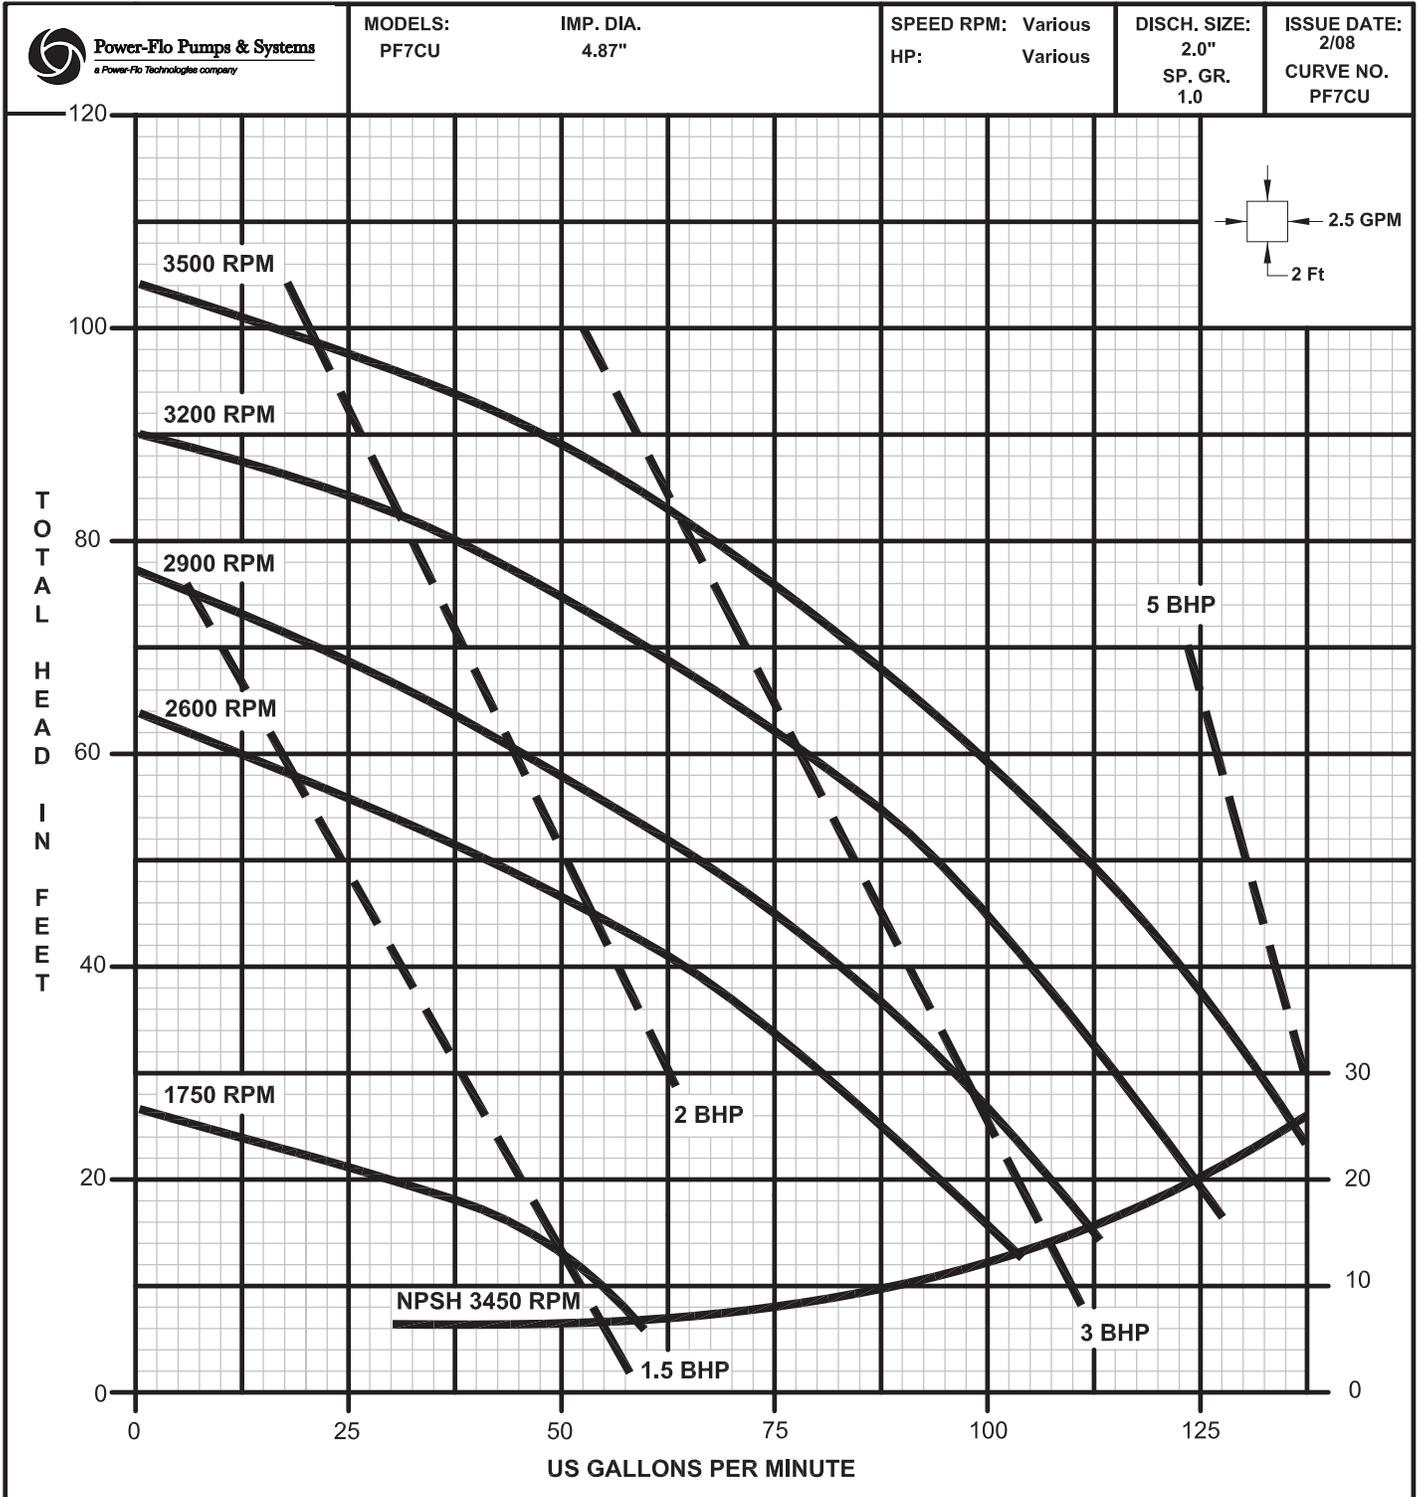

Receiving, Installation & Service**Receiving Inspection**

Upon receiving the pump, it should be inspected for damage or shortages. If damage has occurred, file a claim immediately with the company that delivered the pump. If the manual is removed from the packaging, do not lose or misplace.

Storage

Any product that is stored for a period longer than six (6) months from the date of purchase should be bench tested prior to installation. A bench test consists of, checking the impeller to assure it is free turning and a run test to assure the motor (and switch if provided) operate properly. Do not pump out of liquid.

Location

Locate pump as near as possible to the liquid being pumped. Do Not place pump more that 25 feet above the surface of the liquid supply.

Be sure pump is level. Mount pump firmly so not to move due to vibration. Permanently groute onto a cerment foundation, flex coupled and v-belt driven units. Flex coupled units should be realigned after grouting to eliminate excessive wear on the coupling.

A minimum of 18 inches in front of pump case to permit easy removal and access to the interior of the pump. On v-belt units, allow a minimum of 10 inches at the shaft end to permit easyremoval of pedestal or rotating assembly.

Controls

Be sure the electrical specification of the control selected properly match the electrical specifications of the pump.

Motor Connection

All wiring of motor and control, overload protection and grounding should be in accordance with the National Electrical Code, State and Local codes. Make motor connection per label located on motor or motor manufactures manual.

Rotation

All units rotate "clockwise" as viewed from shaft end of pump. It is necessary to slide one half of the flex coupling back when checking rotation to eliminate the possiblility of unscrewing the impellers which are threaded on the shaft.

Suction

CAUTION! - Pump should not be operated without a suction strainer to prevent foreign matter from being drawn into impeller. The strainer should be cleaned regularly.

The use of pipe the same size as the port size is highly recommended. Using a smaller pipe line can cause internal damage. Make sure all lines have air-tight joints. The smallest air leak in the suction line may prevent the pump from priming. All horizontal suction lines should slope up to the pump to avoid trapped air pockets. All piping should be properly supported.

Discharge

Connect discharge hose or pipe to the discharge port. Make sure all lines have air-tight joints.

Lubrication

Lubrication not required as seal and impeller are water lubricated and need no attension.

Priming

Remove pipe plug (15) in top of body (16) and fill the pump body completely with solids free liquid. In freezing weather prime pump with warm water.



DO NOT operate pump without priming first. Operating dry will damage seal.

Starting

To start pump, apply power to motor per the Motor or Engine manufacture's instructions.

Shutdown

Discontinue operation by stopping the engine as stated in Engine Manual or by disconnecting electric power to motor. It is recommended to drain and flush pump if pump has been operating in freezing weather.

Service

Turn off and lock out power before servicing pump.

Check Valve

Disconnect suction piping and remove hex nuts (30), lockwashers (31) and suction flange (22). Remove gasket (18), weights (17), (19), screw (20) and lockwasher (21) and replace if worn or damaged.

To replace, the *HINGE* section of gasket is at the *TOP* and the *LARGE* weight is on the pump side of gasket.

Body, Volute & Impeller

Disconnect suction and discharge piping. Remove hex nuts (4) and lockwashers (5) then remove body (16) and o-ring (9) from pedestal (6).

Pull volute (13) from pedestal (6). Unscrew the impeller (11) from shaft (23) in the right hand direction. Take note of the size and quantity of shims (10) & (32) used.

To reassemble, use the required number of shims (10) and (32) to result in an impeller-to-volute clearance of .015" max.



Receiving, Installation & Service**Shaft Seal**

Remove rotating member, spring and retaining ring of seal (18) from shaft. Remove stationary by prying out with screwdriver. If any part shows wear or damage replace complete seal (18).



**Handle all seal parts with care.
Do Not damage lapped faces.**

To reassemble, lightly oil ring and press stationary member over shaft and into pedestal (6). Lightly oil shaft (23) and inner surface of bellows of rotating member. With lapped surface facing pedestal, slide rotating member onto shaft until lapped faces of rotating member and stationary are together.

Pedestal & Shaft

Remove capscrews (27) and lockwashers (28) from pedestal (6). Remove bearing cap (26) along with slinger (2), shaft and bearing assembly. To replace bearings (29), press off of shaft (23).

REASSEMBLE PUMP IN OPPOSITE ORDER.



For Repair Part Please supply: Model Number and MFG Date as shown on Name Plate, and Part Description and Part Number as shown on Parts List.

Repair Parts

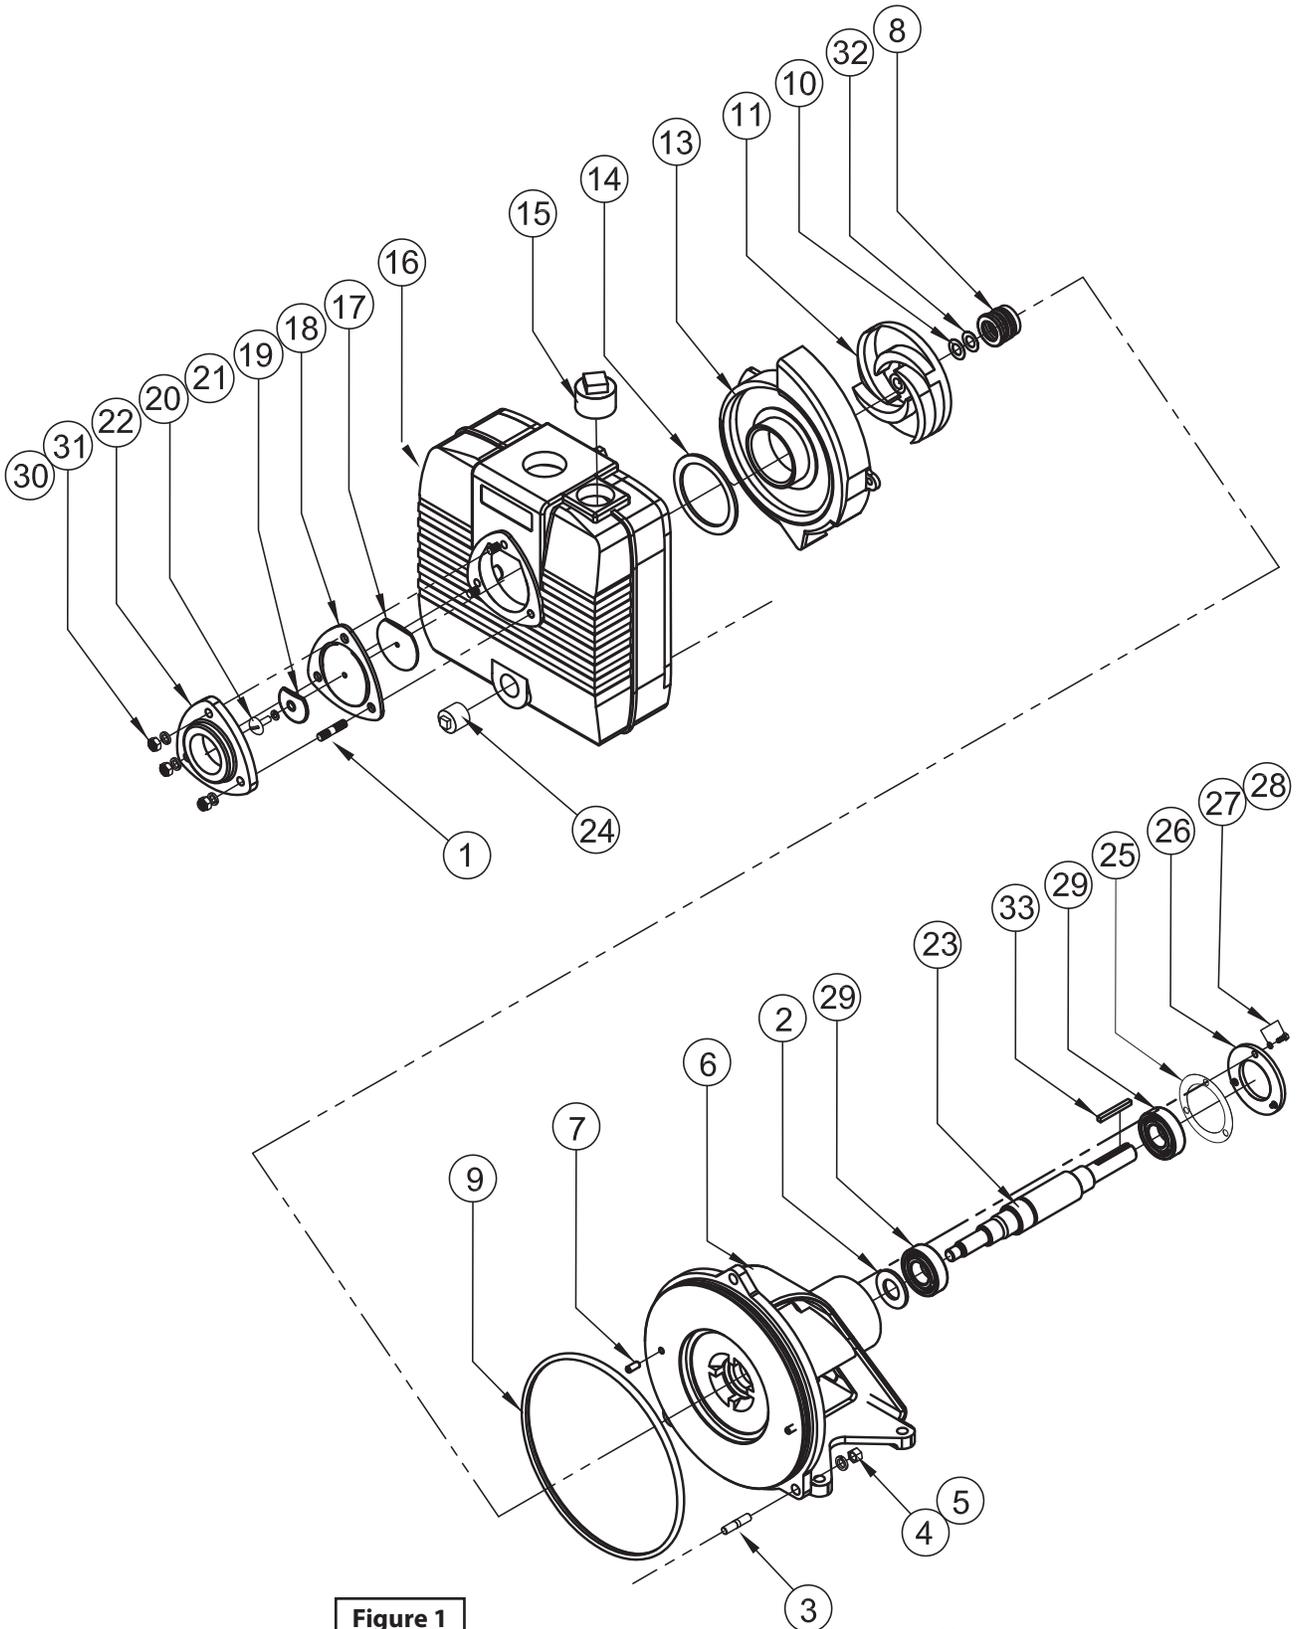


Figure 1



Repair Parts

For Repair Part Please supply: Model Number and MFG Date as shown on Name Plate, and Part Description and Part Number as shown on Parts List.

ITEM		QTY	DESCRIPTION	PF5CU PART No.	PF7CU PART No.
1		3	Stud, 5/16-18 x 1.25" Lg	◆	----
			Stud, 5/16-18 x 2.25" Lg	----	◆
2		1	Slinger	PF018878	PF018878
3		3	Stud, 3/8-16 x 1.50" Lg	◆	◆
4		3	Lockwasher, 3/8"	◆	◆
5		3	Hex nut, 3/8-16	◆	◆
6		1	Pedestal	PF017805	PF017805
7		2	Volute pin	PF017715	PF017715
8	◇	1	Shaft seal, Graphite/Ceramic/NBR-304	PF018873	PF018873
9	◇	1	O-ring, NBR, Φ224 x 3.55mm	PF017713	PF017713
10	◇	3	Shim, .005, Φ22.2 x Φ13 x 0.15mm	PF026706	PF026706
11	☆	1	Impeller, 4.87" Dia, Cast Iron, (STD)	PFCI5CCEIMP	PFCI5CCEIMP
13	☆	1	Volute, Cast Iron (STD)	PFCI5CCEVOL	PFCI5CCEVOL
			Volute, Bronze, Optional	PFBRZ5CCEVOL	PFBRZ5CCEVOL
14	◇	1	Volute gasket, Rubber, Φ88 x 70 x 3mm	PF017714	PF017714
15		1	Pipe plug, 1.75" NPT	◆	◆
16		1	Body, Cast iron	PFCI5CCETNK	PF23723
*	◆		Check Valve Assy, Includes items 17, 18, 19, 20, 21, 22	PF017718	PF017718-2
17	◆	1	Weight, 2.50" O.D., Steel	PF001338	PF001338
18	◇◆	1	Gasket, Neoprene, Neoprene, Φ102 x 3	PF017712	PF017712
19	◆	1	Weight, 1.56" O.D., Steel	PF001339	PF001339
20	◆	1	Round Hd Screw, 1/4-20 x .625" Lg	◆	◆
21	◆	1	Lockwasher, 1/4"	◆	◆
22	◆	1	Suction Flange	PF018099	PF018100
23	☆	1	Shaft, Stainless	PF018874	PF018874
24		1	Pipe plug, 1.25" NPT	◆	◆
25	◇	2	Shim, Bronze, 3" OD	PF018435	PF018435
26		1	Bearing cap	PF018434	PF018434
27		3	Hex Hd screw, 1/4-20 x .625" Lg	◆	◆
28		3	Lockwasher, 1/4"	◆	◆
29	☆	2	Bearing	PF017807	PF017807
30		3	Hex nut, 5/16-18	◆	◆
31		3	Lockwasher, 5/16	◆	◆
33		1	Shaft key, 3/16 sq. x 1.63" Lg	◆	◆
Repair Kits					
◆	Check Valve Assembly - Includes items 17, 18, 19, 20, 21, 22			PF017718	PF017718-2
◇	Seal & Gasket Kit - Includes items 8, 9, 10, 14, 18, 32			PF5CUSEAL-KIT	PF5CUSEAL-KIT

- ◆ = Acquire standard hardware locally.
- ◇ = Seal/Gasket Kit
- ◆ = Check Valve Assembly
- ☆ = Supplied as individual items



Trouble Shooting Chart



Risk of electric shock. Always disconnect the pump from the power source before handling inspections or repairs.

Symptom	Possible Cause(s)	Corrective Action
Little or no discharge and will not prime	<ol style="list-style-type: none"> 1. Pump body not filled with water 2. Total head too high 3. Suction head higher than pump designed for 4. Impeller partially or completely plugged 5. Leak in suction line 6. Foot-valve too small 7. Impeller damaged 8. Foot-valve or suction line not submerged deep enough in water, pulling air 9. Insufficient inlet pressure or suction head 10. Suction piping too small 11. Body gasket leaking 12. Suction or discharge line valves closed 13. Piping damaged 14. Clogged strainer or foot-valve 	<ol style="list-style-type: none"> 1. Fill pump body with water. 2. Shorten suction head 3. Lower suction head, install foot-valve and prime 4. Disassemble pump and clean out impeller 5. Repair or replace suction line 6. Match foot-valve size to piping or install one larger size foot-valve 7. Disassemble pump and replace impeller 8. Submerge lower in water 9. Increase inlet pressure by adding more water to tank or increasing back pressure by turning gate valve on discharge line partially closed. 10. Increase pipe size to pump inlet size or larger 11. Replace 12. Open 13. Clean or replace 14. Clean or replace
Loss of suction after satisfactory operation	<ol style="list-style-type: none"> 1. Air leak in suction line 2. When pump was last turned off, water siphoned out of pump body 3. Suction head higher than pump designed for 4. Insufficient inlet pressure or suction head 5. Clogged foot-valve, strainer or pump 6. Defective wearplate 	<ol style="list-style-type: none"> 1. Repair or replace suction line 2. Refill (re-prime) pump body before restarting 3. Lower suction head, install foot-valve and prime 4. Increase inlet pressure by adding more water to tank or increasing back pressure by turning gate valve on discharge line to partially closed. 5. Unclog or replace 6. Replace
Pump overloads driver	<ol style="list-style-type: none"> 1. Total head lower than pump rating, unit delivering too much water 2. Specific gravity and viscosity of liquid being pumped different than the pump rating 	<ol style="list-style-type: none"> 1. Increase back pressure by turning gate valve on discharge line to partially closed position that will not overload motor. 2. Consult factory
Pump vibrates and/or makes excessive noise	<ol style="list-style-type: none"> 1. Mounting plate or foundation not rigid enough 2. Foreign material in pump causing unbalance 3. Impeller bent 4. Cavitation present 5. Piping not supported to relieve any strain on pump assembly 	<ol style="list-style-type: none"> 1. Reinforce 2. Disassemble pump and remove 3. Replace impeller 4. Check suction line for proper size and check valve in suction line if completely open, remove any sharp bends before pump and shorten suction line 5. Make necessary adjustments
Pump runs but no fluid	<ol style="list-style-type: none"> 1. Air leak in suction piping 2. Pump located too far from fluid source 3. Gate valve closed 4. Clogged strainer 5. Fouled foot-valve 6. Discharge height too great 7. Fouled impeller 8. Faulty mechanical seal 	<ol style="list-style-type: none"> 1. Replace 2. Replace 3. Open 4. Clean or Replace 5. Clean or Replace 6. Lower the height 7. Clean or Replace 8. Replace
Pump leaks at shaft	<ol style="list-style-type: none"> 1. Worn mechanical seal 2. Seal not installed properly 	<ol style="list-style-type: none"> 1. Replace 2. Follow service instructions for installing seal

NOTE: Power-Flo Pumps & Systems assumes no responsibility for damage or injury due to disassembly in the field. Disassembly of the pumps or supplied accessories other than at Power-Flo Pumps & Systems or its authorized service centers, automatically voids warranty.



LIMITED WARRANTY

Manufacturer warrants, to the immediate purchaser and subsequent initial owner during the warranty period, every new pump to be free from defects in material and workmanship under normal use and service, when properly used and maintained, for a period of eighteen (18) months from date of manufacture or twelve (12) months from date of installation (whichever ever comes first). Failure due to wear due to excessive abrasives is not covered. The initial owner is the purchaser who first uses the pump after its initial installation, or for non-permanent installation, the first owner who uses the pump. The date of installation shall be determined by a dated sales receipt noting the model and serial number of the pump. The dated sales receipt must accompany the returned pump. Product will be repaired, replaced or remanufactured at Manufacturer's option. No allowance will be made for shipping charges, damages, labor or other charges that may occur due to product failure, repair or replacement. This warranty does not apply to and there shall be no warranty for any material or product that has been disassembled without prior approval of Manufacturer, subjected to misuse, misapplication, neglect, alteration, accident or act of God; that has not been installed, operated or maintained in accordance with Manufacturer's installation instructions; that has been exposed to outside substances including but not limited to the following: sand, gravel, cement, mud, tar, hydrocarbons, hydrocarbon derivatives (oil, gasoline, solvents, etc.), or other abrasive or corrosive substances, wash towels or feminine sanitary products, etc. in all pumping applications. The warranty set out in the paragraph above is in lieu of all other warranties expressed or implied; and we do not authorize any representative or other person to assume for us any other liability in connection with our products. Contact Manufacturer at: 1-877-24PUMPS or www.powerflopumps.com, Attention: Customer Service Department, to obtain any needed repair or replacement of part(s) or additional information pertaining to our warranty.

MANUFACTURER EXPRESSLY DISCLAIMS LIABILITY FOR SPECIAL, CONSEQUENTIAL OR INCIDENTAL DAMAGES OR BREACH OF EXPRESSED OR IMPLIED WARRANTY; AND ANY IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE AND OF MERCHANTABILITY SHALL BE LIMITED TO THE DURATION OF THE EXPRESSED WARRANTY.

Some states do not allow limitations on the duration of an implied warranty, so the above limitation may not apply to you. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

